




1069.00 EUR
incl. 19% VAT, plus [shipping](#)

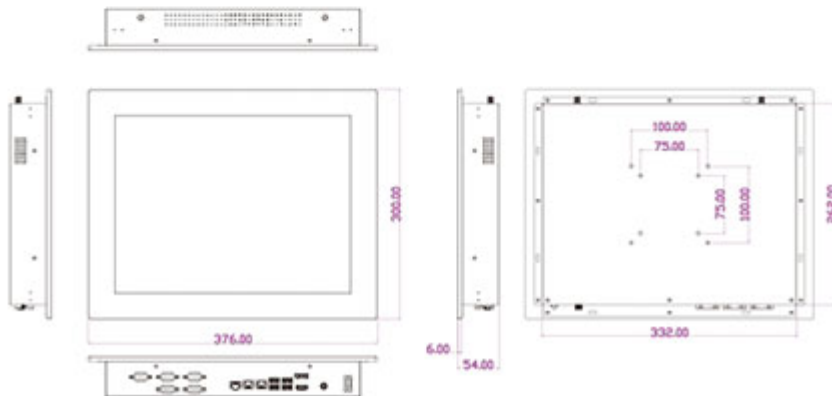

- INTEL® Braswell-M N3160 SOC
- Onboard INTEL® Braswell-M N3160 2.24GHz Quad Cores CPU
- Onboard 4G/1600MHz DDR3L Memory
- 1* 64G M.2 SSD
- Support DirectX 12 3D Graphics Acceleration
- Support 1*Serial ATAIII (6Gb/s) Device
- Support Dual INTEL® Gigabit LAN
- Support HDMI+DP Output
- Support 6* COM ports ■COM2 Support RS422/485■
- Support 1*M.2 Socket for 60G SSD
- Support 1*Mini PCI-E Socket

- Support 4* USB3.0 Ports
- Support wide voltage input :9~36V
- 60mm thin, slice design
- VESA mount(100mm X100mm &75mm x 75mm)

Panel	
Viewable Size Image	15.0 inch With LED Backlight
Active Area	304.128(H) x 228.096(V)
Resolution	1024 x 768 @60Hz
Display Color	262K
Pixel Pitch	0.297 x 0.297 mm
Aspect Ratio	4:3
Contrast Ratio	700:1
Max Brightness	350 cd/m ²
Viewing Angle(H/V)	H170/V160
Response Time	5.7ms
Temperature Range	0°C ■ +65°C(Operating)
Touch	
Touch panel style	5 wires analog resistive
Active Range	304.10 x 228.10mm ±0.2mm
Temperature Range	-10 ~ +60°C(Operating)
Transparency	80 ±3%
Surface Hardness	■ 3H (ASTM D3363, pressure 750g/45°)
Operating Force	■ 80g
Knock test	10,000,000 times keystrokes
Case	
Panel Material	Aluminum
Case Material	Iron
Color	Silver
Coating Requirement	Spray Paint
Speaker	2-CH(3W)
Bracket	6 (Top:2pcs ■ Side:4pcs, Optional)
Installation Type	Open Frame / Wall Hanging ■ Optional ■
Cooling Mode	Fanless Fully sealed design
System Specification	
Form Factor	3.5"
Processor	INTEL® Braswell-M N3160 2.24GHz/QC
System Chipset	INTEL® Braswell -M N3160 (SOC)
System Memory	4G/1600MHz DDR3L SAMSUNG DRAM
BIOS	64MB SPI Flash ROM
Ethernet	1* Gigabit LAN
Audio	Realtek® ALC662 HD Audio
Storage	1* Serial ATA3 6Gb/s connector 1* M.2 64G SSD
WIFI Module	N/A(Optional)
Optical Device	N/A
Expansion	PCI-E mini card for WLAN
Display Output	HDMI+DP
I.O Port	4*USB3.0 ■ 6*RS232(1*RS232/422/485) ■ 2*RJ45CK
Power Adapter	DC-IN (9~36V)
OS Support	Windows 7/8.1/10(Windows 7 64 bit)
Temperature	Operating ■ -10 ~ +60°C
Humidity	20%~90% (non condensing)
Shock	Operating ■ 15G ■ 11ms duration
Vibration	Operating ■ 5~500Hz/1 Grms

Net Weight (kg)	
Dimension	376.0mm*300.0mm*60.0mm
Certification	FCC CE ROHS
Other	Support Non wire I.O interface output
Other Information	
Application	Commercial ■ Banking ■ Digital Signage POS/KIOSK ■ Industrial Automation
Special Features	Metal design, compact ■ Slice
Other	Optional wall hanging telescopic bracket, etc., can also be used as the embedded security